# **Light Tower**

# LIGHT TOWER CONTRIBUTION CON



## Light Tower


# **RL4000**


### **Features**


- Dual self-braking winch design for fast and easy tower erection and extension.
- 30 ft (almost 10 m) light height at full extension for excellent illumination at long distances.
- 360 degree tower rotation to provide pin-point light positioning at your work site.
- 4,000 Watts of light enough to illuminate 7-1/2 acres.
- Quiet 71 dBA sound levels at 23 feet (7 m).
- Excellent fuel economy providing up to 60 hours of run time per tank of fuel.
- Maintenance-friendly electrical assemblies make troubleshooting, service and repair a breeze.
- 3 cylinder diesel engine powers a brushless self regulated type generator.
- Centerpoint lifting bracket and fork lift pockets make transport easy.
- Compact design allows up to 10 units per truck load.
- Engine protection includes high water temperature and low oil pressure shutdowns.
- Cabinet is protected with a durable, fade resistant, polyester powder coat finish.

Specifications	
Lamps	Metal halide 4 x 1,000 W
Generator	Brushless 60 Hz, 6.0 kW
Engine	Kubota diesel 13.6 hp
Fuel capacity	30 gal (114 L)
Wheel size	13" (33 cm)
Axle rating	2,000 lbs (907 kg)
Tongue weight travel position	130 lbs (59 kg)
Total weight no fuel	1,760 lbs (798 kg)

### **Dimensions**





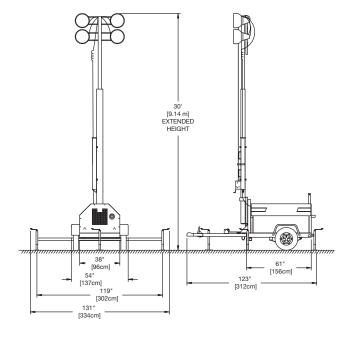



Genie Industries, Inc.

A Terex Company TEL +1 (425) 881-1800 TOLL FREE +1 (800) 536-1800

18340 NE 76th Street PARTS & TECH SUPPORT +1 (800) 228-6444

PO Box 97030 FAX +1 (425) 883-3475 Redmond, WA 98073-9730 WEB www.genieindustries.com For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Genie distributor.